

## PVR-P4-1VB



### 4 Channel Penta-brid 4K Compact 1U Digital Video Recorder



#### Features

- H.265+/H.265 dual-stream video compression
- Supports HDCVI/AHD/TVI/CVBS/IP video inputs
- Max 6 channels IP camera inputs, each channel up to 8MP;
- Max 24Mbps Incoming Bandwidth
- Smart Search and Intelligent Video System

#### Coaxial Audio/Upgrade/Alarm

The integrated design can reduce wiring troubles which makes it much more cost-effective and convenient for installation.

#### Face Detection

It is a typical technology being used in a variety of applications for searching or identification of individuals.

#### Smart Search

This function helps you get more motion detect video during a short time through drawing a region when playback. It is very useful when an emergency occurs.

#### Long Distance Transmission

The HDCVI system supports long distance transmission over coaxial cable and UTP, max. 700m for 4K/4MP, 800m for 1080P and 1200m for 720P.

#### Smart Fan Design

The smart fan can automatically turn on or turn off according to the CPU temperature. This function can effectively reduce the fan noise to provide a better user experience.

#### Intelligent Video System (IVS)

With built-in intelligent video analytics, the XVR has the ability to detect and analyze moving objects for improved video surveillance. The XVR provides optional standard intelligence at the edge allowing detection of multiple object behaviors such as abandoned or missing objects. IVS also supports Tripwire analytics, allowing the camera to detect when a pre-determined line has been crossed.

#### System Overview

Saitell, as a technology leader, is always the first ever developed the shining new technology in the security industry, and today we present XVR. As the perfect solution to upgrade existing video surveillance systems, XVR supports penta-brid access technology such as HDCVI, AHD, TVI, CVBS and IP to effortlessly integrate with popular industry formats, offering an affordable solution loaded with flexible options. It supports up to 4 channels of HDCVI/AHD/TVI/CVBS inputs, and 6 channels IP camera additionally, 4 channels local live-view channels, and 4 playback channels.

Designed as a full compatibility product, XVR is able to provide end user the simplicity of analog system, namely lower system cost, simple installation and use of existing cable. It is ideal for a wide range of applications such as public safety, retail store, transportation, home protection and education.

#### Functions

##### Smart H.265+

Smart Codec, H.265+ can reduce up to 90% bit rate and storage requirements compared with H.264 without having to invest in new cameras.

##### HDCVI/AHD/TVI/CVBS Auto-detect

The DVR can auto recognize the signal of front-camera without any setting. It makes operation more friendly and convenient.

##### 8MP Resolution

This series supports up to 8MP HD resolution (3840 x 2160) IPC input for recording, live viewing.



## PVR-P4-1VB







Technical Specification	
<b>System</b>	
Main Processor	Embedded Processor
Operating System	Embedded LINUX
<b>Video and Audio</b>	
Analog Camera Input	4 Channel, BNC
HDCVI Camera	4K, 6MP, 4MP, 1080P@25/30fps, 720P@50/60fps, 720P@25/30fps
AHD Camera	5MP, 4MP, 3MP, 1080P@25/30, 720P@25/30fps
TVI Camera	5MP, 4MP, 3MP, 1080P@25/30, 720P@25/30fps
CVBS Camera	PAL/NTSC
IP Camera Input	4+2 Channel, each channel up to 8MP
Audio In/Out	1/1, R/A
Two-way Talk	Reuse audio in/out, RCA
<b>Recording</b>	
Compression	H.265+/H.265/H.264+/H.264
Resolution	4K, 6MP, 5MP, 4K-N, 4MP, 3MP, 4M-N, 1080P, 720P, 960H, D1, CIF
Record Rate	Main stream: the 1st channel 4K(1~7fps), 6MP(1~10fps), 5MP(1~12fps), 4MP/3MP(1~15fps), others 4K-N(1~7fps), 4MP/3MP(1~15fps); 4M-N/1080P/720P/960H/D1/CIF (1~25/30fps) Sub stream: 960H(1~15fps); D1/CIF(1~25/30fps)
Bit Rate	32Kbps ~ 6144Kbps Per Channel
Record Mode	Manual, Schedule (General, Continuous), MD (Video detection: Motion Detection, Video Loss, Tampering), Alarm, Stop
Record Interval	1 ~ 60 min (default: 60 min), Pre-record: 1 ~ 30 sec, Post-record: 10 ~ 300 sec
Audio Compression	AAc(only for the 1st channel), G.711A, G.711U, PCM
Audio Sample Rate	8KHz, 16 bit Per Channel
Audio Bit Rate	64Kbps Per Channel
<b>Display</b>	
Interface	1 HDMI, 1 VGA
Resolution	HDMI: 2560x1440, 1920x1080, 1280x1024, 1280x720 VGA: 1920x1080, 1280x1024, 1280x720
Multi-screen Display	When IP extension mode not enabled: 1/4 When IP extension mode enabled: 1/4/6
OSD	Camera title, Time, Video loss, Camera lock, Motion detection, Recording
<b>Network</b>	
Interface	1 RJ-45 Port (100M)
Network Function	HTTP, HTTPS, TCP/IP, IPv4/IPv6, Wi-Fi, 3G/4G, UPnP, RTSP, UDP, SMTP, NTP, DHCP, DNS, IP Filter, PPPoE, DDNS, FTP, Alarm Server, P2P, IP Search
Max. User Access	128 users
Smart Phone	iPhone, iPad, Android
Interoperability	ONVIF 16.12, CGI Conformant

Video Detection and Alarm	
Trigger Events	Recording, PTZ, Tour, Video Push, Email, FTP, Snapshot, Buzzer and Screen Tips
Video Detection	Motion Detection, MD Zones: 396 (22 x 18), Video Loss, Tampering and Diagnosis
Alarm input	N/A
Relay Output	N/A
<b>Playback and Backup</b>	
Playback	1/4
Search Mode	Time /Date, Alarm, MD and Exact Search (accurate to second)
Playback Function	Play, Pause, Stop, Rewind, Fast play, Slow Play, Next File, Previous File, Next Camera, Previous Camera, Full Screen, Repeat, Shuffle, Backup Selection, Digital Zoom
Backup Mode	USB Device/Network
<b>Storage</b>	
Internal HDD	1 SATA Port, up to 10TB capacity
eSATA	N/A
<b>Auxiliary Interface</b>	
USB	2 USB Ports (2 USB 2.0)
RS232	N/A
RS485	1 Port, for PTZ Control
<b>Electrical</b>	
Power Supply	DC12V/2A
Power Consumption (without HDD)	<10W
<b>Construction</b>	
Dimensions	Compact 1U, 260x236x48mm(10.2"x9.3"x1.9")
Net Weight (without HDD)	0.9kg ( 2.0lb)
Gross Weight	1.6kg (3.5 lb)
Installation	Desktop installation
<b>Environmental</b>	
Operating Conditions	-10°C ~ +55°C (+14°F ~ +131°F), 10% ~ 90% RH
Storage Conditions	-20°C ~ +70°C (-4°F ~ +158°F), 0 ~ 90% RH
<b>Third-party Support</b>	
Third-party Support	Dahua, Arecont Vision, AXIS, Bosch, Brickcom, Canon, CP Plus, Dynacolor, Honeywell, Panasonic, Pelco, Samsung, Sanyo, Sony, Videotec, Vivotek, and more
<b>Certifications</b>	
Certifications	FCC: Part 15 Subpart B CE: CE-LVD: EN 60950-1/IEC 60950-1 CE-EMC: EN 61000-3-2, EN 61000-3-3, EN 55032, EN 50130, EN 55024 UL: UL 60950-1


## PVR-P4-1VB



### Dimensions(mm)

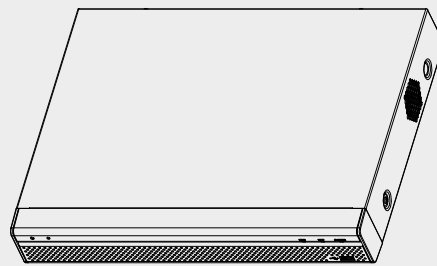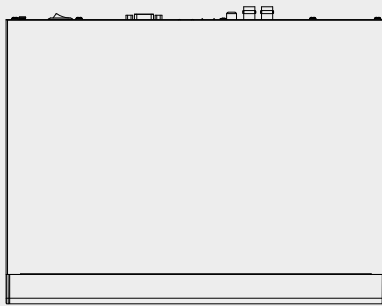

### Rear Panel

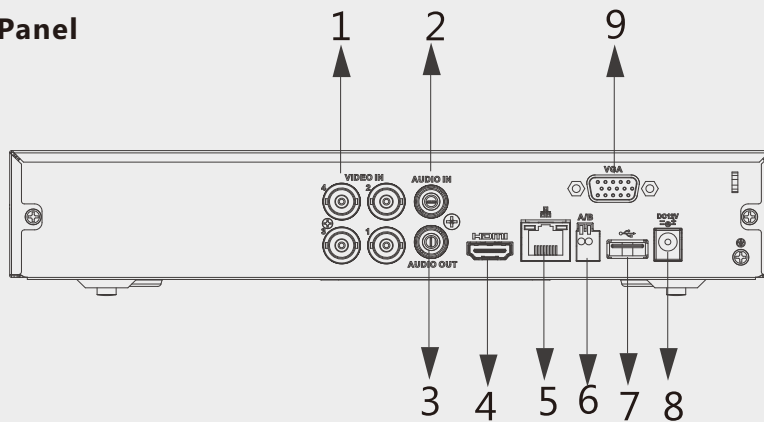

- |   |                          |   |                   |
|---|--------------------------|---|-------------------|
| 1 | VIDEO IN                 | 6 | RS485 Interface   |
| 2 | AUDIO IN, RCA Connector  | 7 | USB Interface     |
| 3 | AUDIO OUT, RCA Connector | 8 | DC12V Power Input |
| 4 | HDMI Interface           | 9 | VGA Interface     |
| 5 | Network Interface        |   |                   |